




## HOW TO MAKE UP 'WOOD' FRAMES

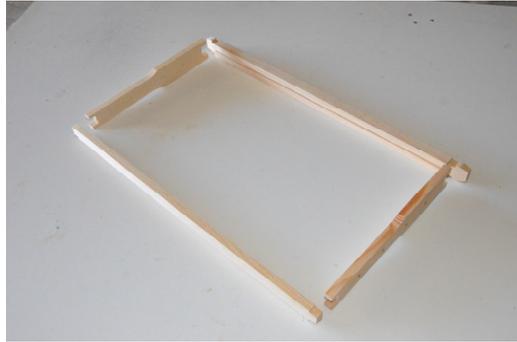

1. Place the top bar, with the groove facing up, on a bench.

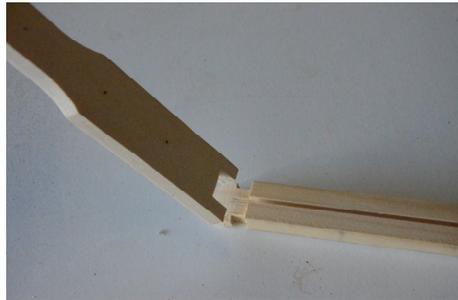

2. Place a small amount of glue in the hollows at the top and bottom of the end bars. Use P.V.A glue. We recommend Augadhere.
3. Push the end bars into position on the lugs of the top bar.
4. Put the bottom bar into position.

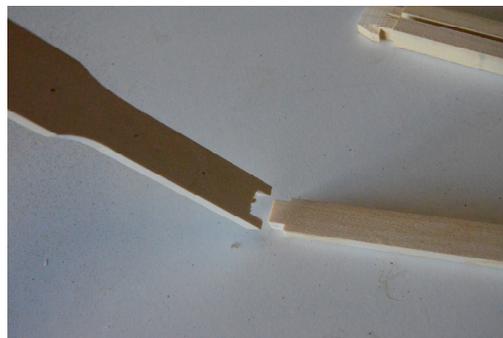

5. Drive one nail, size 30x1.4 or size 25 x 1.25 in each end of the bottom bar.
6. Turn the frame right way up, and drive one nails, 30 x 1.4, in each end of the top bar finishing off as for the bottom bar. If the right amount of glue is used, one nail in each of the joints will prove sufficient.

Alternate method – if not using glue, it is necessary to use two nails at each corner of the frame, making a total of eight nails in each frame. Some beekeepers also drive a very fine nail, 20 x 1.1, through the lugs at the top of the end bar.

**DO NOT PAINT THE FRAMES!**

\*\*\* Instructions reprinted from their "How To" pamphlet with acknowledgments and kind permission of John L Guilfoyle Pty Ltd. \*\*\*